

HLAK 25 TYP C - 1 POLIG



080110-0-X

HAUPTLEITUNG

2 x 25 mm² - 2,5 mm² (4 - 14 AWG)
16 mm² - 1,5 mm² (6 - 16 AWG)



ABZWEIGLEITUNG

2 x 16 mm² - 2,5 mm² (6 - 14 AWG)
10 mm² - 1,5 mm² (8 - 16 AWG)



- > Modularer Aufbau, Modulbreite 17,8 mm
- > Beliebig anreihbar
- > Montage auf DIN Schiene TS 35



AL/CU



080110-1-X



080110-2-X



080110-3-X



080110-4-X

FÜR ALUMINIUM UND KUPFERLEITER (AL/CU)



NENNSPANNUNG

1000 V AC/DC
1000 V AC/DC
600 V

STROMBELASTBARKEIT

152 A Cu
100 A Al
90 A Cu / 70 A Al

ZULASSUNG

IEC 60947-7-1
IEC 61238-1 (Class A)
UL-1059 / CSA C22.2 No.158-10

Ausführung	Artikel Nr. *	Typ	VPE	GTIN / EAN
HLAK 25/16 für Aluminium/ Kupferleiter	080110-0-3	HLAK 25/16 L G	5/60	4051589011037
	080110-1-3	HLAK 25/16 N	5/60	4051589011136
	080110-2-3	HLAK 25/16 PE	5/60	4051589011235
	080110-3-3	HLAK 25/16 L B	5/60	4051589011334
	080110-4-3	HLAK 25/16 L S	5/60	4051589011433

* Weitere Farben auf Anfrage

FÜR KUPFERLEITER (CU)



NENNSPANNUNG

1000 V AC/DC
690 V

STROMBELASTBARKEIT

152 A
100 A


ZULASSUNG

IEC 60947-7-1
DIN VDE 0603-2

Ausführung	Artikel Nr. *	Typ	VPE	GTIN / EAN
HLAK 25/16 für Kupferleiter	080110-0-4	HLAK 25/16 L G	5/60	4051589801102
	080110-1-4	HLAK 25/16 N	5/60	4051589801119
	080110-2-4	HLAK 25/16 PE	5/60	4051589801126
	080110-3-4	HLAK 25/16 L B	5/60	4051589801133
	080110-4-4	HLAK 25/16 L S	5/60	4051589801140

* Weitere Farben auf Anfrage

Verlustleistung HLAK 25/16

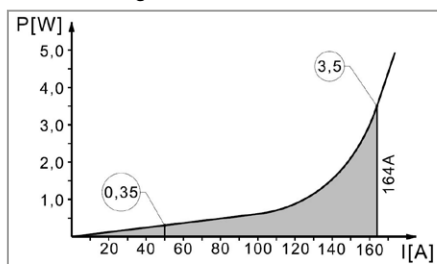

Abmessungen:

