

MAIN LINE BRANCH TERMINALS (HLAK)

HLAK 25 TYPE C - 1 POLE



080110-0-X

MAIN LINE

2 x 25 mm² - 2,5 mm² (4 - 14 AWG)
16 mm² - 1,5 mm² (6 - 16 AWG)



BRANCH LINE

2 x 16 mm² - 2,5 mm² (6 - 14 AWG)
10 mm² - 1,5 mm² (8 - 16 AWG)



- > modular system, module width 17,8 mm
- > user-defined stackable
- > to fit on DIN rail TS 35



AL/CU



080110-1-X



080110-2-X



080110-3-X



080110-4-X

FOR ALUMINIUM AND COPPER CONDUCTORS (AL/CU)



NOMINAL VOLTAGE

1000 V AC/DC
1000 V AC/DC
600 V

NOMINAL CURRENT

152 A Cu
100 A Al
90 A Cu / 70 A Al

STANDARDS

IEC 60947-7-1
IEC 61238-1 (Class A)
UL-1059 / CSA C22.2 No.158-10

Model	Part No. *	Type	PU	GTIN / EAN
HLAK 25/16 for aluminium/ copper conductors	080110-0-3	HLAK 25/16 L G	5/60	4051589011037
	080110-1-3	HLAK 25/16 N	5/60	4051589011136
	080110-2-3	HLAK 25/16 PE	5/60	4051589011235
	080110-3-3	HLAK 25/16 L B	5/60	4051589011334
	080110-4-3	HLAK 25/16 L S	5/60	4051589011433

* Other colours available on request

FOR COPPER CONDUCTORS (CU)



NOMINAL VOLTAGE

1000 V AC/DC
690 V

NOMINAL CURRENT

152 A
100 A


STANDARDS

IEC 60947-7-1
DIN VDE 0603-2

Model	Part No. *	Type	PU	GTIN / EAN
HLAK 25/16 for copper conductors	080110-0-4	HLAK 25/16 L G	5/60	4051589801102
	080110-1-4	HLAK 25/16 N	5/60	4051589801119
	080110-2-4	HLAK 25/16 PE	5/60	4051589801126
	080110-3-4	HLAK 25/16 L B	5/60	4051589801133
	080110-4-4	HLAK 25/16 L S	5/60	4051589801140

* Other colours available on request

Power loss HLAK 25/16

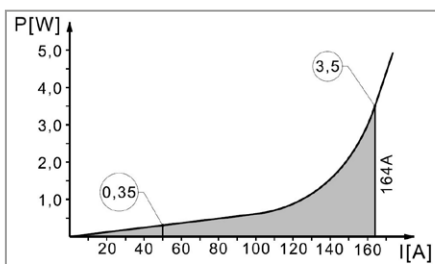

Dimensions:

