

# MAIN LINE BRANCH TERMINALS (HLAK)

## HLAK 25 3/2 Type C - 3 pole



080130-0-X

### MAINLINE (PER POLE)

2 x 25 mm<sup>2</sup> - 2,5 mm<sup>2</sup> (4 - 14 AWG)  
16 mm<sup>2</sup> - 1,5 mm<sup>2</sup> (6 - 16 AWG)



### BRANCHLINE (PER POLE)

2 x 16 mm<sup>2</sup> - 2,5 mm<sup>2</sup> (6 - 14 AWG)  
10 mm<sup>2</sup> - 1,5 mm<sup>2</sup> (8 - 16 AWG)



- > modular system, module width 17,8 mm
- > user-defined stackable
- > to fit on DIN rail TS 35



**AL / CU**



080130-1-X



080130-5-X

## For aluminium and copper conductors (Al/Cu)



### NOMINAL VOLTAGE

1000 V AC/DC  
1000 V AC/DC  
600 V

### NOMINAL CURRENT

152 A Cu  
100 A Al  
90 A Cu / 70 A Al

### STANDARDS

IEC 60947-7-1  
IEC 61238-1 (Class A)  
UL-1059 / CSA C22.2 No.158-10

Model	Part No. *	Type	PU	GTIN / EAN
HLAK 25/16 for aluminium/ copper conductors	080130-0-3	HLAK 25/16 3/2 3L G	2/24	4051589013031
	080130-1-3	HLAK 25/16 3/2 L G/N/PE	2/24	4051589013130
	080130-5-3	HLAK 25/16 3/2 3L BSG	2/24	4051589013536

\* Other colours/colour combinations available on request

## For copper conductors (Cu)



### NOMINAL VOLTAGE

1000 V AC/DC  
690 V

### NOMINAL CURRENT

152 A  
100 A


### STANDARDS

IEC 60947-7-1  
DIN VDE 0603-2

Model	Part No. *	Type	PU	GTIN / EAN
HLAK 25/16 for copper conductors	080130-0-4	HLAK 25/16 3/2 3L G	2/24	4051589801300
	080130-1-4	HLAK 25/16 3/2 L G/N/PE	2/24	4051589801317
	080130-5-4	HLAK 25/16 3/2 3L BSG	2/24	4051589801355

\* Other colours/colour combinations available on request

### Power loss HLAk 25/16

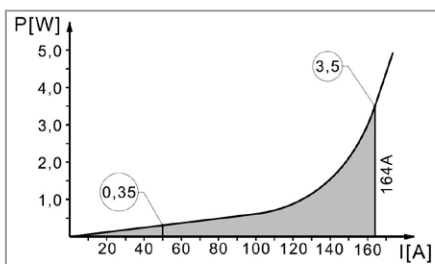

### Dimensions:

