

HLAK 35 TYP C - 1 POLIG



080210-0-X

HAUPTLEITUNG

2 x 35 mm² - 4 mm² (2 - 12 AWG)
25 mm² - 2,5 mm² (4 - 14 AWG)



ABZWEIGLEITUNG

2 x 25 mm² - 2,5 mm² (4 - 14 AWG)
16 mm² - 1,5 mm² (6 - 16 AWG)



- > Modularer Aufbau
- > Beliebig anreihbar
- > Montage auf DIN Schiene TS 35



080210-1-X



080210-2-X



080210-3-X



080210-4-X

AL / CU

Für Aluminium und Kupferleiter (Al/Cu)



NENNSPANNUNG

1000 V AC/DC
1000 V AC/DC
600 V

STROMBELASTBARKEIT

202 A Cu
125 A Al
125 A Cu / 100 A Al

ZULASSUNG

IEC 60947-7-1
IEC 61238-1 (Class A)
UL-1059 / CSA C22.2 No.158-10



Ausführung	Artikel Nr. *	Typ	VPE	GTIN / EAN
HLAK 35/25 für Aluminium/ Kupferleiter	080210-0-3	HLAK 35/25 L G	5/60	4051589021036
	080210-1-3	HLAK 35/25 N	5/60	4051589021135
	080210-2-3	HLAK 35/25 PE	5/60	4051589021234
	080210-3-3	HLAK 35/25 L B	5/60	4051589021333
	080210-4-3	HLAK 35/25 L S	5/60	4051589021432

* Weitere Farben auf Anfrage

Für Kupferleiter (Cu)



NENNSPANNUNG

1000 V AC/DC
690 V

STROMBELASTBARKEIT

202 A
125 A

ZULASSUNG


IEC 60947-7-1
DIN VDE 0603-2



Ausführung	Artikel Nr. *	Typ	VPE	GTIN / EAN
HLAK 35/25 für Kupferleiter	080210-0-4	HLAK 35/25 L G	5/60	4051589802109
	080210-1-4	HLAK 35/25 N	5/60	4051589802116
	080210-2-4	HLAK 35/25 PE	5/60	4051589802123
	080210-3-4	HLAK 35/25 L B	5/60	4051589802130
	080210-4-4	HLAK 35/25 L S	5/60	4051589802147

* Weitere Farben auf Anfrage

Verlustleistung HLAK 35/25

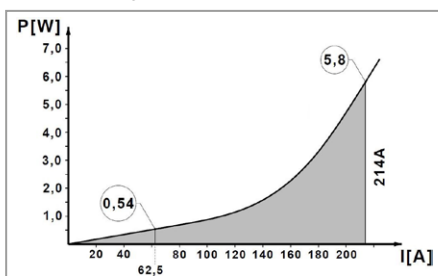

Abmessungen:

