

MAIN LINE BRANCH TERMINALS (HLAK)

HLAK 35 Type C - 1 pole



080210-0-X

MAIN LINE

2 x 35 mm² - 4 mm² (2 - 12 AWG)
25 mm² - 2,5 mm² (4 - 14 AWG)



BRANCH LINE

2 x 25 mm² - 2,5 mm² (4 - 14 AWG)
16 mm² - 1,5 mm² (6 - 16 AWG)



- > modular system
- > user-defined stackable
- > to fit on DIN rail TS 35



080210-1-X



080210-2-X



080210-3-X



080210-4-X

AL / CU

For aluminium and copper conductors (Al/Cu)



NOMINAL VOLTAGE	NOMINAL CURRENT	STANDARDS
1000 V AC/DC	202 A Cu	IEC 60947-7-1
1000 V AC/DC	125 A Al	IEC 61238-1 (Class A)
600 V	125 A Cu / 100 A Al	UL-1059 / CSA C22.2 No.158-10

Model	Part No. *	Type	PU	GTIN / EAN
HLAK 35/25 for aluminium/ copper conductors	080210-0-3	HLAK 35/25 L G	5/60	4051589021036
	080210-1-3	HLAK 35/25 N	5/60	4051589021135
	080210-2-3	HLAK 35/25 PE	5/60	4051589021234
	080210-3-3	HLAK 35/25 L B	5/60	4051589021333
	080210-4-3	HLAK 35/25 L S	5/60	4051589021432

* Other colours available on request

For copper conductors (Cu)




NOMINAL VOLTAGE	NOMINAL CURRENT	STANDARDS
1000 V AC/DC	202 A	IEC 60947-7-1
690 V	125 A	DIN VDE 0603-2

Model	Part No. *	Type	PU	GTIN / EAN
HLAK 35/25 for copper conductors	080210-0-4	HLAK 35/25 L G	5/60	4051589802109
	080210-1-4	HLAK 35/25 N	5/60	4051589802116
	080210-2-4	HLAK 35/25 PE	5/60	4051589802123
	080210-3-4	HLAK 35/25 L B	5/60	4051589802130
	080210-4-4	HLAK 35/25 L S	5/60	4051589802147

* Other colours available on request

Power loss HLAk 35/25

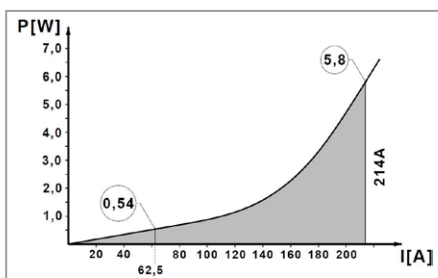

Dimensions:

