

## HLAK 35 Type C - 3 pole



080230-0-X

### MAINLINE (PER POLE)

2 x 35 mm<sup>2</sup> - 4 mm<sup>2</sup>  
25 mm<sup>2</sup> - 2,5 mm<sup>2</sup>



### BRANCHLINE (PER POLE)

2 x 25 mm<sup>2</sup> - 2,5 mm<sup>2</sup>  
16 mm<sup>2</sup> - 1,5 mm<sup>2</sup>



- > modular system
- > user-defined stackable
- > to fit on DIN rail TS 35



080230-1-X



080230-5-X

**AL / CU**

## For aluminium and copper conductors (Al/Cu)



NOMINAL VOLTAGE	NOMINAL CURRENT	STANDARDS
1000 V AC/DC	202 A Cu	IEC 60947-7-1
1000 V AC/DC	125 A Al	IEC 61238-1 (Class A)

Model	Part No. *	Type	PU	GTIN / EAN
HLAK 35/25 for aluminium/ copper conductors	080230-0-3	HLAK 35/25 3L G	2/24	4051589023030
	080230-1-3	HLAK 35/25 L G/N/PE	2/24	4051589023139
	080230-5-3	HLAK 35/25 3L BSG	2/24	4051589023535

\* Other colours/colour combinations available on request

## For copper conductors (Cu)




NOMINAL VOLTAGE	NOMINAL CURRENT	STANDARDS
1000 V AC/DC	202 A	IEC 60947-7-1
690 V	125 A	DIN VDE 0603-2

Model	Part No. *	Type	PU	GTIN / EAN
HLAK 35/25 for copper conductors	080230-0-4	HLAK 35/25 3L G	2/24	4051589802307
	080230-1-4	HLAK 35/25 L G/N/PE	2/24	4051589802314
	080230-5-4	HLAK 35/25 3L BSG	2/24	4051589802352

\* Other colours/colour combinations available on request

### Power loss HLAk 35/25

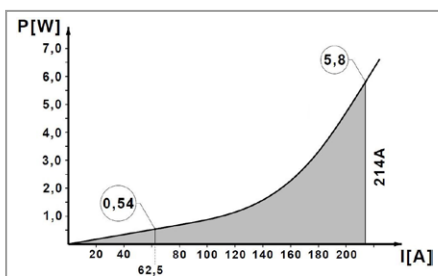

### Dimensions:

