

MAIN LINE BRANCH TERMINALS (HLAK)

HLAK 35D Type C - 1 pole



080220-0-X

MAIN LINE

4 x 35 mm² - 4 mm²
25 mm² - 2,5 mm²



- > modular system
- > user-defined stackable
- > to fit on DIN rail TS 35

BRANCH LINE

4 x 25 mm² - 2,5 mm²
16 mm² - 1,5 mm²



AL / CU



080220-1-X



080220-2-X



080220-3-X



080220-4-X

For aluminium and copper conductors (Al/Cu)



NOMINAL VOLTAGE

1000 V AC/DC
1000 V AC/DC

NOMINAL CURRENT

428 A Cu
125 A Al

STANDARDS

IEC 60947-7-1
IEC 61238-1 (Class A)

| Model | Part No. * | Type | PU | GTIN / EAN |
|--|------------|------------------|------|---------------|
| HLAK 35/25-D for aluminium/ copper conductors | 080220-0-3 | HLAK 35/25-D L G | 2/24 | 4051589022033 |
| | 080220-1-3 | HLAK 35/25-D N | 2/24 | 4051589022132 |
| | 080220-2-3 | HLAK 35/25-D PE | 2/24 | 4051589022231 |
| | 080220-3-3 | HLAK 35/25-D L B | 2/24 | 4051589022330 |
| | 080220-4-3 | HLAK 35/25-D L S | 2/24 | 4051589022439 |

* Other colours available on request

For copper conductors (Cu)



NOMINAL VOLTAGE

1000 V AC/DC
690 V

NOMINAL CURRENT

428 A
125 A


STANDARDS

IEC 60947-7-1
DIN VDE 0603-2

| Model | Part No. * | Type | PU | GTIN / EAN |
|--|------------|------------------|------|---------------|
| HLAK 35/25-D for copper conductors | 080220-0-4 | HLAK 35/25-D L G | 2/24 | 4051589802208 |
| | 080220-1-4 | HLAK 35/25-D N | 2/24 | 4051589802215 |
| | 080220-2-4 | HLAK 35/25-D PE | 2/24 | 4051589802222 |
| | 080220-3-4 | HLAK 35/25-D L B | 2/24 | 4051589802239 |
| | 080220-4-4 | HLAK 35/25-D L S | 2/24 | 4051589802246 |

* Other colours available on request

Power loss HLAk 35/25-D

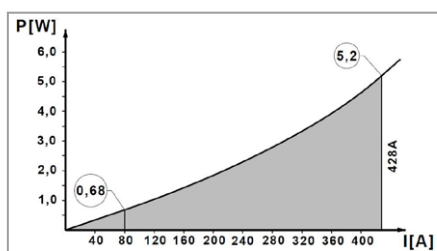

Dimensions:

