

HLAK 70 TYP C - 1 POLIG



080310-0-X

HAUPTLEITUNG

2 x 70 mm² - 10 mm² (2/0 - 8 AWG)
2 x 50 mm² - 6 mm² (1/0 - 10 AWG)



ABZWEIGLEITUNG

2 x 50 mm² - 6 mm² (1/0 - 10 AWG)
2 x 35 mm² - 4 mm² (2 - 12 AWG)



- > Modularer Aufbau
- > Beliebig anreihbar
- > Montage auf DIN Schiene TS 35



AL / CU



080310-1-X



080310-2-X



080310-3-X



080310-4-X

Für Aluminium und Kupferleiter (Al/Cu)



NENNSPANNUNG

1000 V AC/DC
1000 V AC/DC
600 V

STROMBELASTBARKEIT

300 A Cu
185 A Al
160 A Cu / 120 A Al

ZULASSUNG

IEC 60947-7-1
IEC 61238-1 (Class A)
UL-1059 / CSA C22.2 No.158-10

Ausführung	Artikel Nr. *	Typ	VPE	GTIN / EAN
HLAK 70/50 für Aluminium/ Kupferleiter	080310-0-3	HLAK 70/50 L G	3/36	4051589031035
	080310-1-3	HLAK 70/50 N	3/36	4051589031134
	080310-2-3	HLAK 70/50 PE	3/36	4051589031233
	080310-3-3	HLAK 70/50 L B	3/36	4051589031332
	080310-4-3	HLAK 70/50 L S	3/36	4051589031431

* Weitere Farben auf Anfrage

Für Kupferleiter (Cu)



NENNSPANNUNG

1000 V AC/DC
690 V

STROMBELASTBARKEIT

300 A
160 A


ZULASSUNG

IEC 60947-7-1
DIN VDE 0603-2

Ausführung	Artikel Nr. *	Typ	VPE	GTIN / EAN
HLAK 70/50 für Kupferleiter	080310-0-4	HLAK 70/50 L G	3/36	4051589803106
	080310-1-4	HLAK 70/50 N	3/36	4051589803113
	080310-2-4	HLAK 70/50 PE	3/36	4051589803120
	080310-3-4	HLAK 70/50 L B	3/36	4051589803137
	080310-4-4	HLAK 70/50 L S	3/36	4051589803144

* Weitere Farben auf Anfrage

Verlustleistung HLAK 70/50

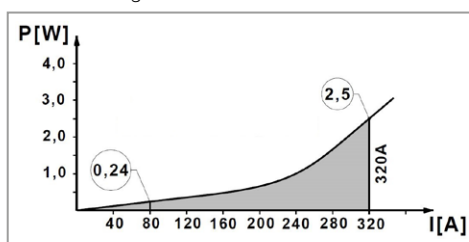

Abmessungen:

