


BUSBARS FOR MCBS, MCBS + AUXILIARY CONTACT AND D0



1-pole Pin

- > cuttable
- > Fingersafe according to DIN EN 50274

SUITABLE END CAP EK 1

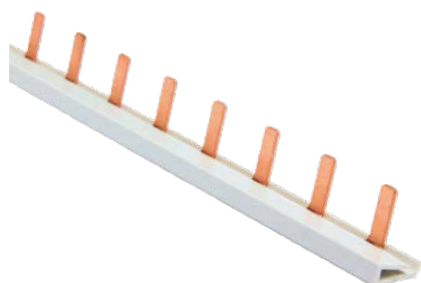

EK 1/10-16

EK	mm ²	Part no.	PU	GTIN /EAN
EK 1/10-16	10/16	085931-0-4	10	4051589593106

Type	Part no.	Cross section	Nominal Current	Modules	Pitch	PU	GTIN /EAN
S-1L-106/10	085507-9-4	10 mm ²	63 A	6	17,8 mm	20	4051589550796
S-1L-106/16	085508-9-4	16 mm ²	80 A	6	17,8 mm	20	4051589550895
S-1L-160/10	085509-9-4	10 mm ²	63 A	9	17,8 mm	20	4051589550994
S-1L-160/16	085510-9-4	16 mm ²	80 A	9	17,8 mm	20	4051589551090
S-1L-210/10	085501-9-4	10 mm ²	63 A	12	17,8 mm	20	4051589550192
S-1L-210/16	085502-9-4	16 mm ²	80 A	12	17,8 mm	20	4051589550291
S-1L-268/10	085503-9-4	10 mm ²	63 A	15	17,8 mm	20	4051589550390
S-1L-268/16	085504-9-4	16 mm ²	80 A	15	17,8 mm	20	4051589550499
S-1L-320/10	085505-9-4	10 mm ²	63 A	18	17,8 mm	20	4051589550598
S-1L-320/16	085506-9-4	16 mm ²	80 A	18	17,8 mm	20	4051589550697
S-1L-1000/10	085531-9-4	10 mm ²	63 A	57	17,8 mm	50	4051589553193
S-1L-1000/16	085532-9-4	16 mm ²	80 A	57	17,8 mm	50	4051589553292
S-1L+9-1000/10	085562-9-4	10 mm ²	63 A	37	17,8 + 9 mm	50	4051589556293
S-1L+9-1000/16	085563-9-4	16 mm ²	80 A	37	17,8 + 9 mm	50	4051589556392
S-1L-27-1000/10	085560-9-4	10 mm ²	63 A	37	27 mm	50	4051589556095
S-1L-27-1000/16	085561-9-4	16 mm ²	80 A	37	27 mm	50	4051589556194

TOUCH PROTECTION FOR FORK AND PIN BUSBARS

SUITABLE FOR CUTTABLE BUSBARS



BUSBAR TYPE	POLE WIDTH (PITCH)	
1 - 4 phase Fork and Pin	17,6 -18 mm (cuttable)	
Part no.	PU	GTIN /EAN
085990-2-4	10	4051589599023


BUSBARS FOR MCBS, MCBS + AUXILIARY CONTACT AND D0



2-pole Pin

- > cuttable
- > Fingersafe according to DIN EN 50274

SUITABLE END CAP EK 2 FOR 10MM² AND EK 2/3 FOR 16MM²

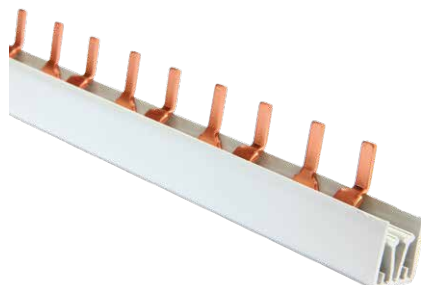

EK	mm ²	Part no.	PU	GTIN /EAN
EK 2/10	10	085932-0-4	10	4051589593205
EK 2-3/16	16	085934-0-4	10	4051589593403



EK 2/10



EK 2-3/16

Type	Part no.	Cross section	Nominal Current	Modules	Pitch	PU	GTIN /EAN
S-2L-106/10	085644-9-4	10 mm ²	63 A	6	17,8 mm	20	4051589564496
S-2L-106/16	085645-9-4	16 mm ²	80 A	6	17,8 mm	20	4051589564595
S-2L-210/10	085638-9-4	10 mm ²	63 A	12	17,8 mm	20	4051589563895
S-2L-210/16	085639-9-4	16 mm ²	80 A	12	17,8 mm	20	4051589563994
S-2L-320/10	085637-9-4	10 mm ²	63 A	18	17,8 mm	20	4051589563796
S-2L-320/16	085646-9-4	16 mm ²	80 A	18	17,8 mm	20	4051589564694
S-2L-1000/10	085630-9-4	10 mm ²	63 A	56	17,8 mm	25	4051589563093
S-2L-1000/16	085631-9-4	16 mm ²	80 A	56	17,8 mm	25	4051589563192
S-2L+9-1000/10	085642-9-4	10 mm ²	63 A	46	17,8 + 9 mm	25	4051589564298
S-2L+9-1000/16	085643-9-4	16 mm ²	80 A	46	17,8 + 9 mm	25	4051589564397
S-2L-27-1000/10	085640-9-4	10 mm ²	63 A	38	27 mm	25	4051589564090
S-2L-27-1000/16	085641-9-4	16 mm ²	80 A	38	27 mm	25	4051589564199

TOUCH PROTECTION FOR FORK AND PIN BUSBARS

SUITABLE FOR CUTTABLE BUSBARS



BUSBAR TYPE	POLE WIDTH (PITCH)	
1 - 4 phase Fork and Pin	17,6 -18 mm (cuttable)	
Part no.	PU	GTIN /EAN
085990-2-4	10	4051589599023


BUSBARS FOR MCBS, MCBS + AUXILIARY CONTACT AND D0



3-pole Pin

- > cuttable
- > Fingersafe according to DIN EN 50274

SUITABLE END CAP EK 3 FOR 10MM² AND EK 2/3 FOR 16MM²

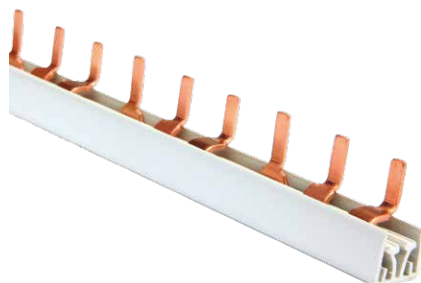

EK	mm ²	Part no.	PU	GTIN /EAN
EK 3/10	10	085933-0-4	10	4051589593304
EK 2-3/16	16	085934-0-4	10	4051589593403



EK 3/10



EK 2-3/16

Type	Part no.	Cross section	Nominal Current	Modules	Pitch	PU	GTIN /EAN
S-3L-106/10	085738-9-4	10 mm ²	63 A	6	17,8 mm	20	4051589573894
S-3L-106/16	085739-9-4	16 mm ²	80 A	6	17,8 mm	20	4051589573993
S-3L-160/10	085740-9-4	10 mm ²	63 A	9	17,8 mm	20	4051589574099
S-3L-160/16	085741-9-4	16 mm ²	80 A	9	17,8 mm	20	4051589574198
S-3L-210/10	085736-9-4	10 mm ²	63 A	12	17,8 mm	20	4051589573696
S-3L-210/16	085737-9-4	16 mm ²	80 A	12	17,8 mm	20	4051589573795
S-3L-268/10	085742-9-4	10 mm ²	63 A	15	17,8 mm	20	4051589574297
S-3L-268/16	085743-9-4	16 mm ²	80 A	15	17,8 mm	20	4051589574396
S-3L-320/10	085744-9-4	10 mm ²	63 A	18	17,8 mm	20	4051589574495
S-3L-320/16	085745-9-4	16 mm ²	80 A	18	17,8 mm	20	4051589574594
S-3L-375/10	085746-9-4	10 mm ²	63 A	21	17,8 mm	20	4051589574693
S-3L-375/16	085747-9-4	16 mm ²	80 A	21	17,8 mm	20	4051589574792
S-3L-1000/10	085730-9-4	10 mm ²	63 A	57	17,8 mm	20	4051589573092
S-3L-1000/16	085731-9-4	16 mm ²	80 A	57	17,8 mm	20	4051589573191
S-3L+9-1000/10	085735-9-4	10 mm ²	63 A	48	17,8 + 9 mm	20	4051589573597
S-3L+9-1000/16	085733-9-4	16 mm ²	80 A	48	17,8 + 9 mm	20	4051589573399
S-3L-27-1000/10	085760-9-4	10 mm ²	63 A	36	27 mm	20	4051589576093
S-3L-27-1000/16	085761-9-4	16 mm ²	80 A	36	27 mm	20	4051589576192

TOUCH PROTECTION FOR FORK AND PIN BUSBARS

SUITABLE FOR CUTTABLE BUSBARS




BUSBAR TYPE	POLE WIDTH (PITCH)	
1 - 4 phase Fork and Pin	17,6 -18 mm (cuttable)	
Part no.	PU	GTIN /EAN
085990-2-4	10	4051589599023

BUSBARS FOR MCBS, MCBS + AUXILIARY CONTACT AND DO



4-pole Pin

- > cuttable
- > Fingersafe according to DIN EN 50274

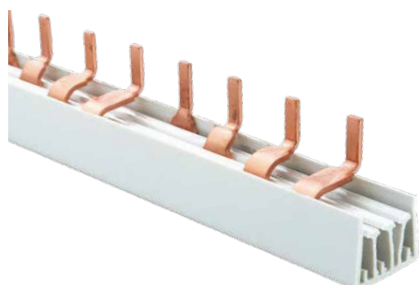

SUITABLE END CAP EK 4

EK	mm ²	Part no.	PU	GTIN /EAN
EK 4/10-16	10/16	085935-0-4	10	4051589593502



EK 4/10-16

Type	Part no.	Cross section	Nominal Current	Modules	Pitch	PU	GTIN /EAN
S-4L-160/10	085842-9-4	10	63 A	8	17,8 mm	20	4051589584296
S-4L-160/16	085843-9-4	16	80 A	8	17,8 mm	20	4051589584395
S-4L-210/10	085836-9-4	10	63 A	12	17,8 mm	20	4051589583695
S-4L-210/16	085837-9-4	16	80 A	12	17,8 mm	20	4051589583794
S-4L-285/10	085844-9-4	10	63 A	16	17,8 mm	20	4051589584494
S-4L-285/16	085845-9-4	16	80 A	16	17,8 mm	20	4051589584593
S-4L-1000/10	085830-9-4	10	63 A	56	17,8 mm	15	4051589583091
S-4L-1000/16	085831-9-4	16	80 A	56	17,8 mm	15	4051589583190
S-4L+9-1000/10	085839-9-4	10	63 A	36	17,8 + 9 mm	15	4051589583992
S-4L+9-1000/16	085840-9-4	16	80 A	48	17,8 + 9 mm	15	4051589584098
S-1L+N-2L+N-3L+N-1000/10	085010-0-4	10	63 A	54	17,8 mm	15	4051589501002
S-1L+N-2L+N-3L+N-1000/16	085832-9-4	16	80 A	54	17,8 mm	15	4051589583299
S-1L+N+9-2L+N+9-3L+N+9-1000/10	085008-0-4	10	63 A	42	17,8 + 9 mm	15	4051589500807
S-1L+N+9-2L+N+9-3L+N+9-1000/16	085841-9-4	16	80 A	42	17,8 + 9 mm	15	4051589584197

TOUCH PROTECTION FOR FORK AND PIN BUSBARS

SUITABLE FOR CUTTABLE BUSBARS



BUSBAR TYPE	POLE WIDTH (PITCH)	
1 - 4 phase Fork and Pin	17,6 -18 mm (cuttable)	
Part no.	PU	GTIN /EAN
085990-2-4	10	4051589599023